
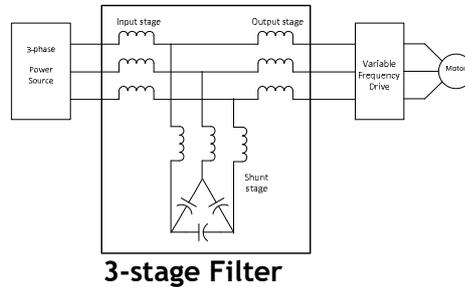


Technical Data - IHF


440-480 Volts, 60Hz

IHF56-0011

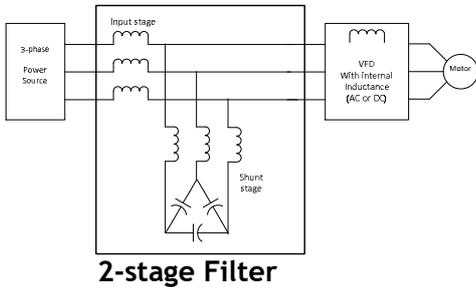


Reactors:

Input & Output Stage Reactor

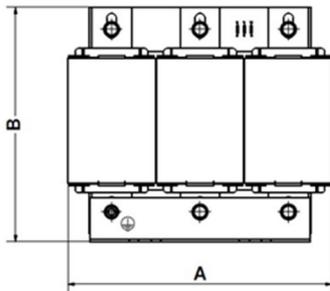

Shunt Stage Reactor

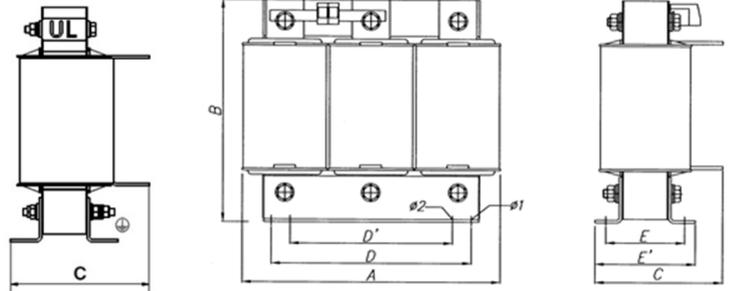

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0011	4.5	Block	147 / 5.8	152 / 6	101 / 4	7 / 15.0	45
Shunt Stage	ACS43-0005	9.67	Block	149 / 5.8	152 / 6	89 / 4	6 / 14	50

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0011	6.5	Block	219 / 8.7	215 / 8.5	120 / 4.8	11 / 25	70
-B	ACL45-0011	3.5	Block	144 / 5.7	152 / 6	86 / 3.4	5 / 12	45
-C	ACL43-0011	2.2	Block	117 / 4.6	125 / 5	68 / 2.7	4 / 10	40
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	1	LKT 4.0-600-DD60	9.7	85 / 3.35	266 / 10.5	1.5 / 3.4	5