
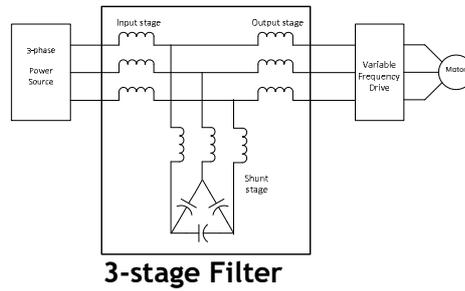


Technical Data - IHF


440-480 Volts, 60Hz

IHF56-0014

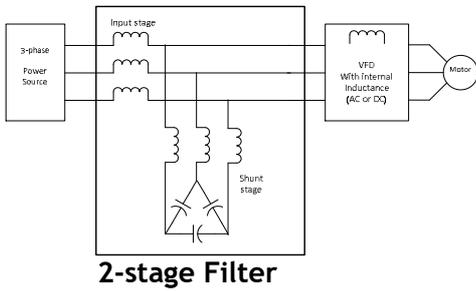


Reactors:

Input & Output Stage Reactor

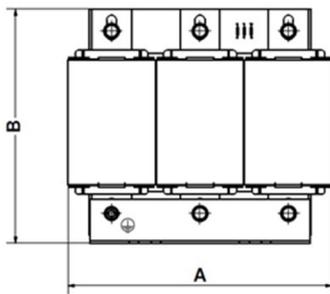

Shunt Stage Reactor

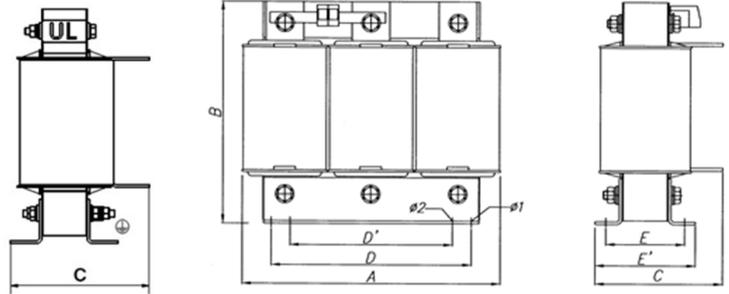

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0014	3.5	Block	147 / 5.8	152 / 6	101 / 4	7 / 16	60
Shunt Stage	ACS43-0007	7.56	Block	178 / 7	178 / 7	82 / 3.3	7 / 15	70

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0015	4.8	Block	243 / 9.6	233 / 9.2	120 / 4.8	13 / 29	90
-B	ACL45-0014	2.7	Block	147 / 5.8	152 / 6	101 / 4	7 / 15	50
-C	ACL43-0014	1.7	Block	144 / 5	152 / 6	86 / 3.4	5 / 12	45
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	1	LKT 5.0-600-DD60	12.4	85 / 3.35	266 / 10.5	1.5 / 3.4	7