
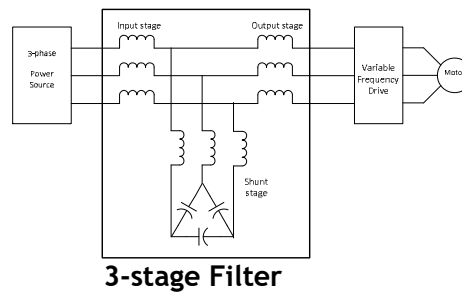


Technical Data - IHF


440-480 Volts, 60Hz

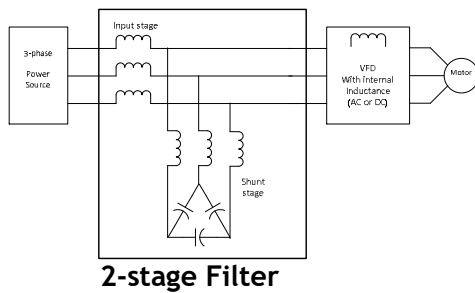


IHF56-0021

Reactors:

Input & Output Stage Reactor



Shunt Stage Reactor

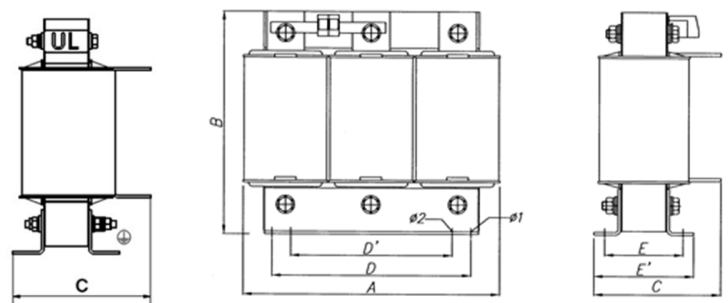

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0022	2.2	Block	176 / 7	213 / 8.4	103 / 4	10 / 24	70
Shunt Stage	ACS43-0010	5.07	Block	178 / 7	179 / 7	82 / 3.3	7 / 17	80

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0021	3.6	Block	243 / 9.6	241 / 9.5	132 / 5.2	16 / 36	120
-B	ACL45-0021	1.85	Block	176 / 6.9	213 / 8.4	103 / 4.1	9 / 20	70
-C	ACL43-0022	1.1	Block	147 / 5	152 / 6	101 / 4	7 / 16	50
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	1	LKT 7.5-600-DD60	18.5	85 / 3.35	266 / 10.5	1.5 / 3.4	10