
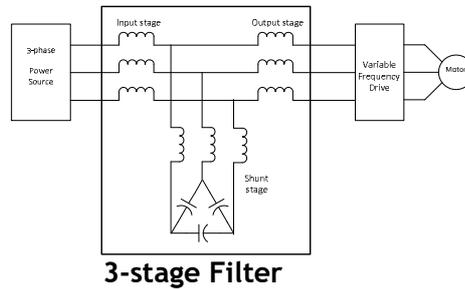


# Technical Data - IHF


## 440-480 Volts, 60Hz

IHF56-0027

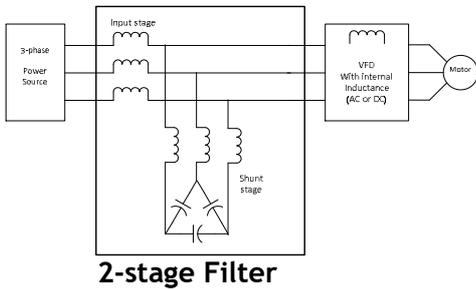


### Reactors:

#### Input & Output Stage Reactor

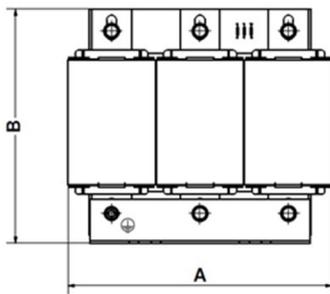

#### Shunt Stage Reactor

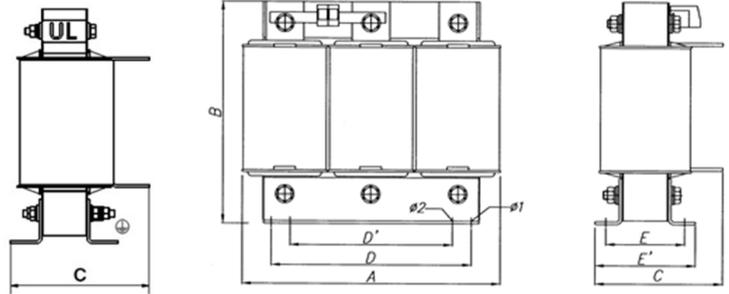

Note: Shunt stage reactor includes temperature switch

### Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0027	1.8	Block	202 / 8	179 / 7	132 / 5.2	13 / 29	90
Shunt Stage	ACS43-0013	3.81	Block	178 / 7	178 / 7	102 / 4	10 / 22	100

### Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0027	2.7	Block	316 / 12.5	249 / 10	164 / 6.5	24 / 53	150
-B	ACL45-0027	1.45	Block	175 / 6.9	213 / 8.4	113 / 4.5	11 / 25	80
-C	ACL43-0028	0.86	Block	174 / 6.9	213 / 8.4	93 / 3.7	8 / 17	70
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

### Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	1	LKT 10.0-600-DD60	24.6	85 / 3.35	266 / 10.5	1.5 / 3.4	13