



# Technical Data - IHF

## 440-480 Volts, 60Hz

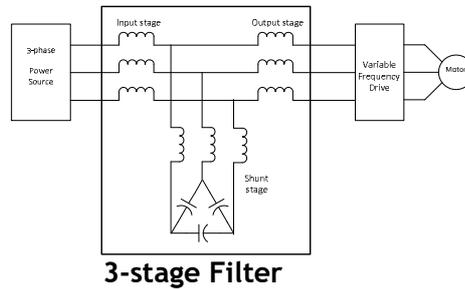


IHF56-0040

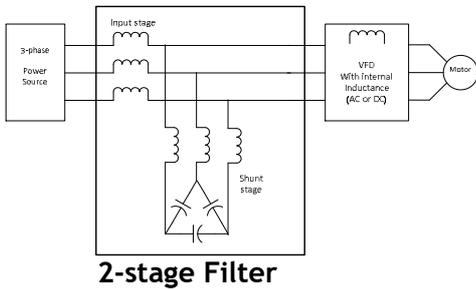

### Reactors:

#### Input & Output Stage Reactor

#### Shunt Stage Reactor

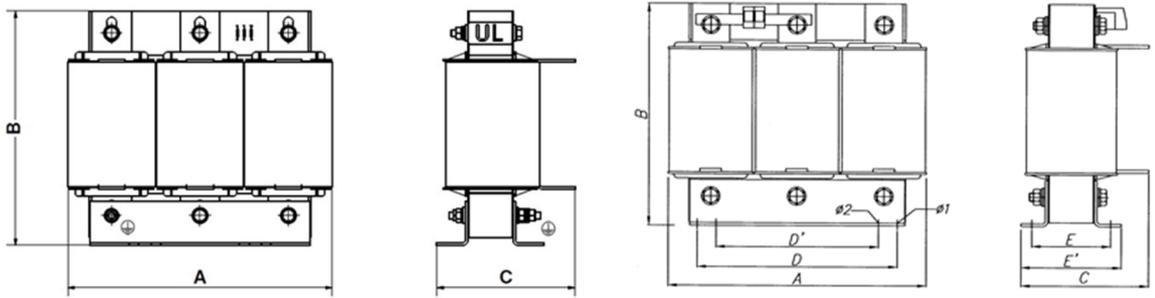

Note: Shunt stage reactor includes temperature switch

### Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0041	1.19	Bus bar	223 / 8.8	176 / 7	141 / 5.6	17 / 38	110
Shunt Stage	ACS43-0019	2.54	Block	202 / 8	208 / 8.2	119 / 4.7	14 / 31	130

### Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0040	1.8	Bus bar	316 / 12.4	231 / 9.1	207 / 8.1	29 / 64	170
-B	ACL45-0040	0.96	Bus bar	202 / 8	179 / 7	131 / 5.2	13 / 29	120
-C	ACL43-0040	0.58	Bus bar	178 / 7	159 / 6.3	122 / 4.8	10 / 22	90
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

### Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	1	LKT 15.0-600-DD60	36.9	85 / 3.35	266 / 10.5	1.5 / 4.2	20