
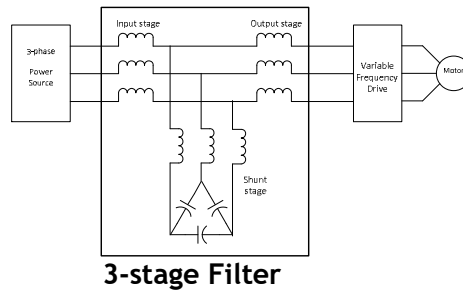


Technical Data - IHF


440-480 Volts, 60Hz

IHF56-0052

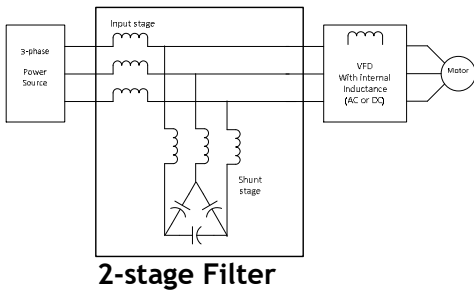


Reactors:

Input & Output Stage Reactor



Shunt Stage Reactor

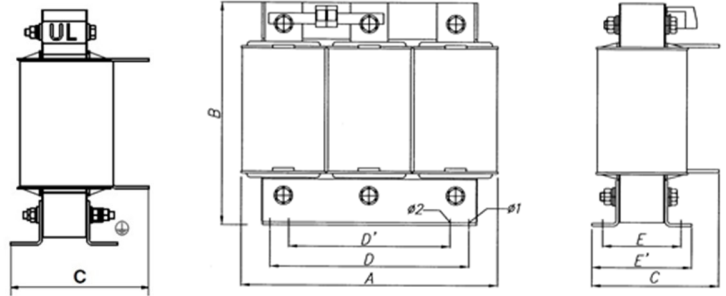

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0052	0.95	Bus bar	223 / 8.8	201 / 7.9	141 / 5.6	19 / 42	130
Shunt Stage	ACS43-0022	2.18	Bus bar	225 / 8.9	162 / 6.4	146 / 5.8	15 / 33	140

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0052	1.4	Bus bar	316 / 12.5	250 / 10	213 / 8.4	31 / 68	240
-B	ACL45-0052	0.75	Bus bar	224 / 8.8	177 / 7	142 / 5.6	17 / 42	130
-C	ACL43-0052	0.46	Bus bar	200 / 7.9	179 / 7.1	131 / 5.2	13 / 29	120
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	1	LKT 17.5-600-DD60	43	85 / 3.35	329 / 12.9	1.9 / 4.2	23