
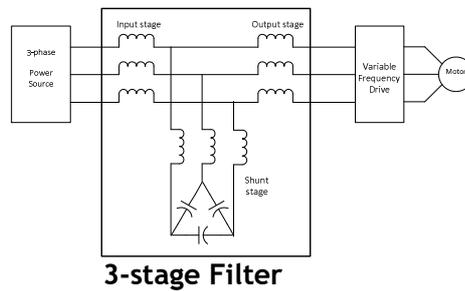


Technical Data - IHF


440-480 Volts, 60Hz

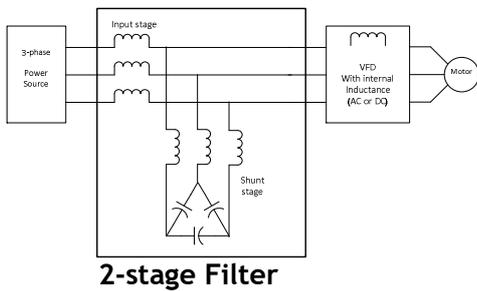


IHF56-0065

Reactors:

Input & Output Stage Reactor

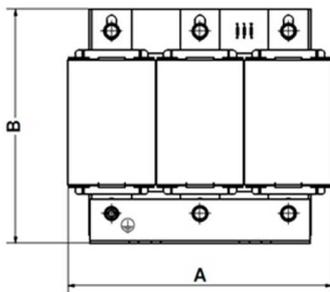

Shunt Stage Reactor

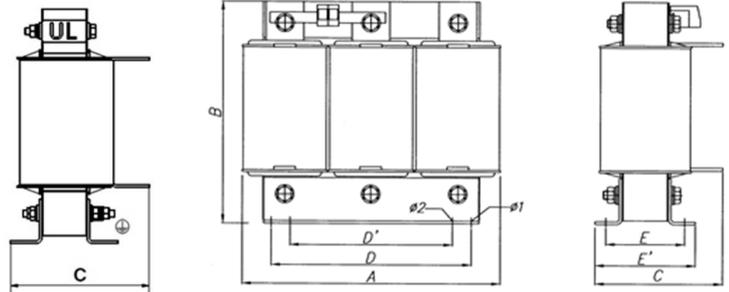

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0066	0.75	Bus bar	222 / 9.3	201 / 8.3	140 / 5.9	19 / 51	140
Shunt Stage	ACS43-0028	1.70	Bus bar	225 / 8.9	177 / 7	146 / 5.8	17 / 38	160

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0065	1.1	Bus bar	352 / 13.8	234 / 9.2	240 / 9.4	42 / 93	230
-B	ACL45-0065	0.60	Bus bar	226 / 8.9	201 / 7.9	142 / 5.6	19 / 42	140
-C	ACL43-0066	0.37	Bus bar	223 / 8.8	162 / 6.4	141 / 5.6	15 / 35	120
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	1	LKT 22.5-600-DD60	85 / 3.35	371 / 14.6	2.1 / 4.9	85 / 3.35	29