
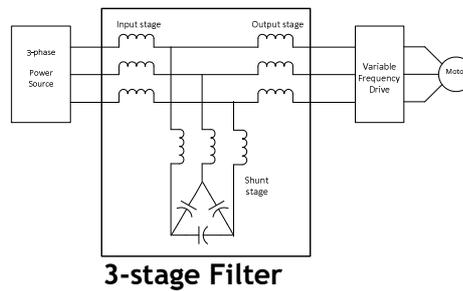


Technical Data - IHF


440-480 Volts, 60Hz

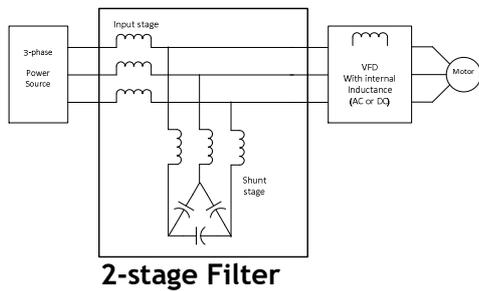


IHF56-0077

Reactors:

Input & Output Stage Reactor

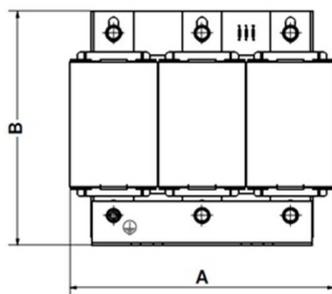

Shunt Stage Reactor

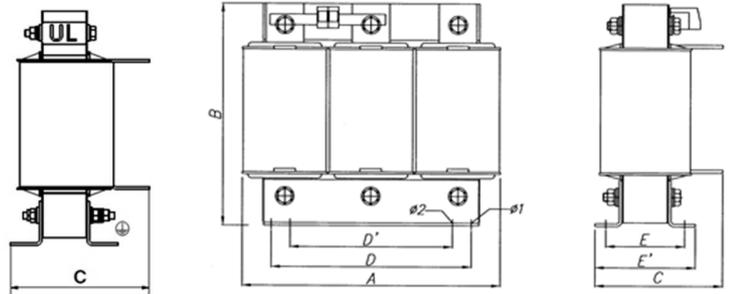

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0081	0.61	Bus bar	257 / 10.2	232 / 9.2	156 / 6.2	28 / 62	170
Shunt Stage	ACS43-0035	1.38	Bus bar	239 / 9.4	212 / 8.4	142 / 5.6	19 / 42	190

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0077	0.93	Bus bar	352 / 14	266 / 10.5	230 / 9.1	41 / 88	260
-B	ACL45-0080	0.49	Bus bar	239 / 9.4	212 / 8.4	139 / 5.5	20 / 44	180
-C	ACL43-0081	0.30	Bus bar	223 / 8.8	177 / 7	141 / 5.6	17 / 38	140
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	1	LKT 15.0-600-DD60	36.9	85 / 3.35	266 / 10.5	1.5 / 3.4	36
	1	LKT 12.5-600-DD60	30.7	85 / 3.35	266 / 10.5	1.5 / 3.4	