
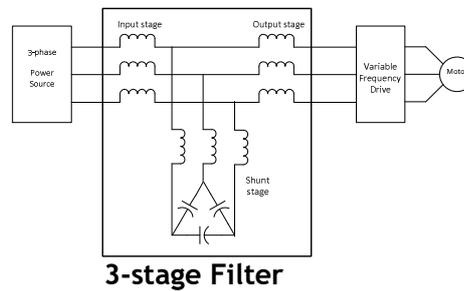


Technical Data - IHF


440-480 Volts, 60Hz

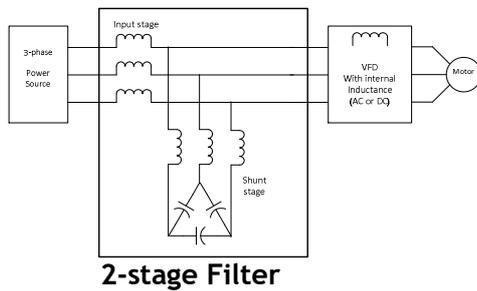


IHF56-0100

Reactors:

Input & Output Stage Reactor

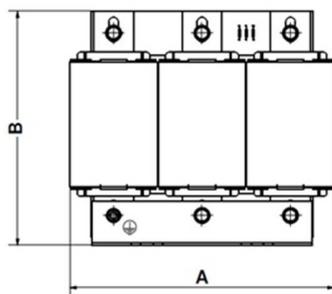

Shunt Stage Reactor

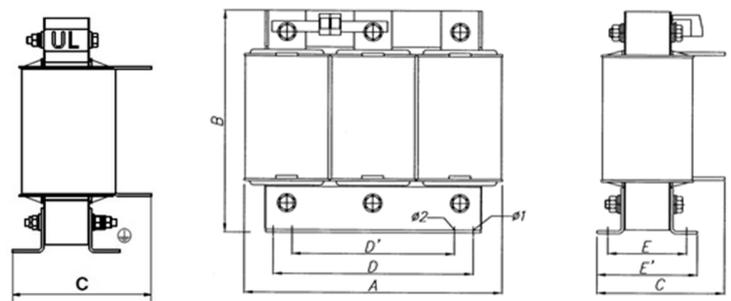

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

| 2-stage | Reactor p/n | mH | Terminals | A [mm/inch] | B [mm/inch] | C [mm/inch] | Weight [kg/lbs] | Watts |
|-------------|-------------|------|-----------|----------------|----------------|----------------|--------------------|-------|
| Input Stage | ACL65-0106 | 0.46 | Bus bar | 263 / 10.4 | 232 / 9.2 | 168 / 6.6 | 29 / 64 | 200 |
| Shunt Stage | ACS43-0044 | 1.09 | Bus bar | 233 / 9.2 | 212 / 8.4 | 152 / 6 | 22 / 49 | 220 |

Optional Reactors for output stage (3-stage filter):

| Suffix (Cat. No.) | Reactor p/n | mH | Terminals | A [mm/inch] | B [mm/inch] | C [mm/inch] | Weight [kg/lbs] | Watts |
|----------------------|-------------|------|-----------|----------------|----------------|----------------|--------------------|-------|
| -A | PSD53-0100 | 0.72 | Bus bar | 360 / 14.2 | 314 / 12.4 | 241 / 9.5 | 59 / 130 | 240 |
| -B | ACL45-0106 | 0.37 | Bus bar | 239 / 9.4 | 212 / 8.4 | 150 / 5.9 | 23 / 51 | 210 |
| -C | ACL43-0100 | 0.24 | Bus bar | 223 / 8.8 | 202 / 8 | 141 / 5.6 | 19 / 42 | 160 |
| No suffix | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |

Capacitors:

| | Qty | p/n | uF (3x Δ) | Diameter [mm/inch] | Height [mm/inch] | Weight [kg/lbs] | Watts |
|-------------|-----|-------------------|--------------|-----------------------|---------------------|--------------------|-------|
| Shunt Stage | 2 | LKT 17.5-600-DD60 | 2x 43 | 2x 85 / 3.35 | 2x 329 / 12.9 | 2x 1.9 / 4.2 | 45 |