


Technical Data - IHF


440-480 Volts, 60Hz



IHF56-0125

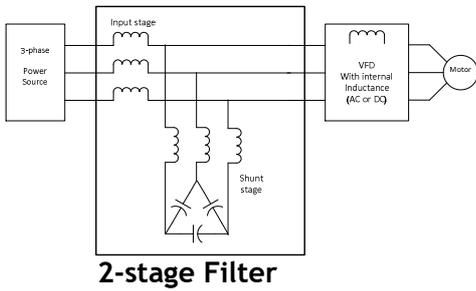

2-stage Filter

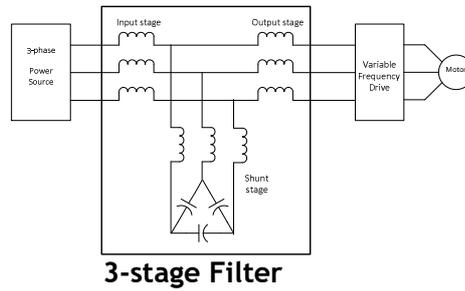


3-stage Filter

Reactors:

Input & Output Stage Reactor

Shunt Stage Reactor

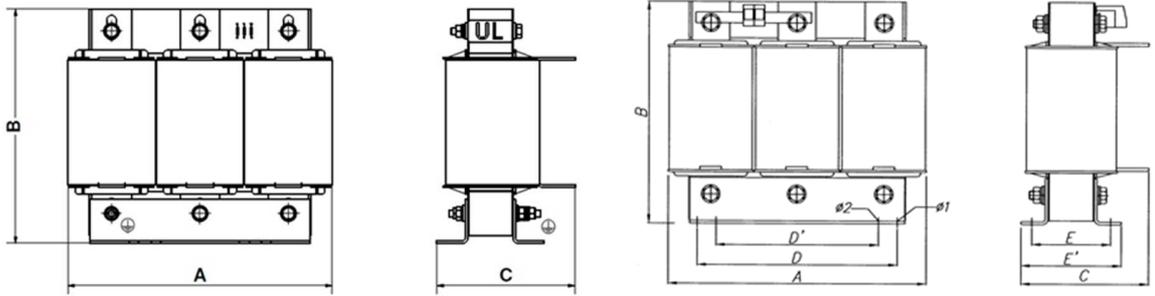

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0129	0.38	Bus bar	300 / 11.7	235 / 9.2	181 / 7.1	35 / 77	230
Shunt Stage	ACS43-0057	0.85	Bus bar	256 / 10	233 / 9.2	158 / 6.3	27 / 60	270

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0125	0.57	Bus bar	360 / 14.2	314 / 12.4	259 / 10.2	69 / 152	250
-B	ACL45-0129	0.30	Bus bar	263 / 10.4	251 / 9.9	159 / 6.3	31 / 68	235
-C	ACL43-0125	0.19	Bus bar	239 / 9.4	212 / 8.4	149 / 5.9	20 / 44	190
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	2	LKT 22.5-600-DD60	2x 55.2	2x 85 / 3.35	2x 371 / 14.6	2x 2.1 / 4.9	58