
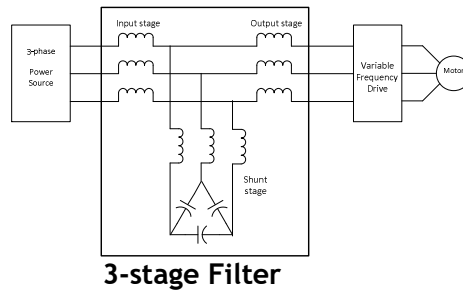


# Technical Data - IHF

## 440-480 Volts, 60Hz





IHF56-0156

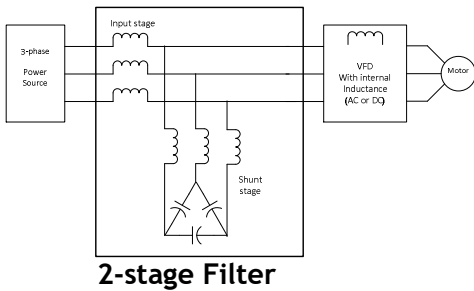

### Reactors:

#### Input & Output Stage Reactor

#### Shunt Stage Reactor



Note: Shunt stage reactor includes temperature switch

### Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0156	0.30	Bus bar	300 / 11.7	266 / 10.5	180 / 7.1	39 / 86	260
Shunt Stage	ACS43-0073	0.66	Bus bar	300 / 11.7	266 / 10.5	170 / 6.7	37 / 82	320

### Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0156	0.41	Bus bar	420 / 16.6	369 / 14.6	251 / 10	76 / 167	420
-B	ACL45-0159	0.245	Bus bar	297 / 11.7	235 / 9.3	181 / 7.1	35 / 77	260
-C	ACL43-0158	0.15	Bus bar	240 / 9.5	212 / 8.4	165 / 6.5	25 / 55	200
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

### Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	2	LKT 17.5-600-DD60	2x 43	85/ 3.35	329 / 12.9	1.9 / 4.2	75
	1	LKT 22.5-600-DD60	55.2	85/ 3.35	371 / 14.6	2.1 / 4.9	