
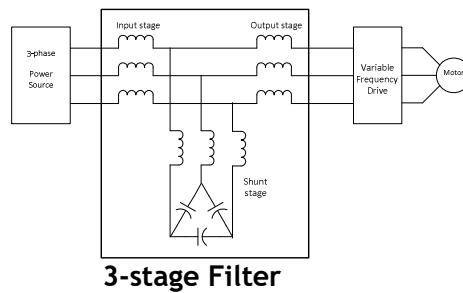


Technical Data - IHF


440-480 Volts, 60Hz

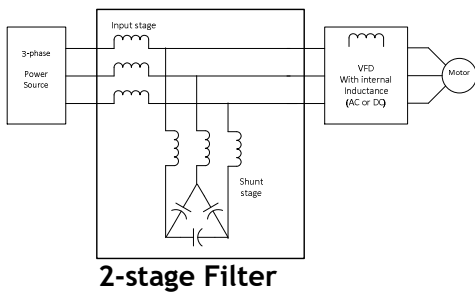


IHF56-0185

Reactors:

Input & Output Stage Reactor



Shunt Stage Reactor

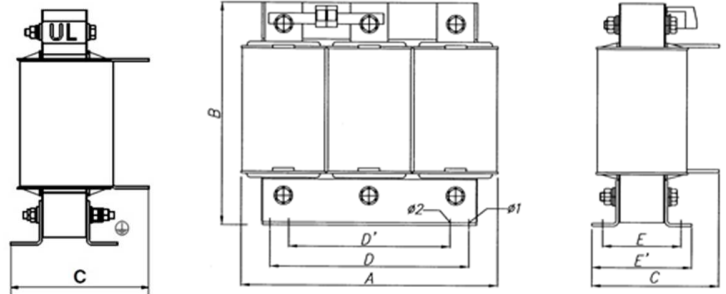

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0192	0.25	Bus bar	300 / 11.8	298 / 11.8	183 / 7.2	44 / 97	310
Shunt Stage	ACS43-0085	0.56	Bus bar	300 / 11.8	265 / 10.5	186 / 7.3	43 / 95	340

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0187	0.39	Bus bar	420 / 16.6	367 / 14.5	269 / 10.6	92 / 203	460
-B	ACL45-0185	0.21	Bus bar	300 / 11.8	236 / 9.3	199 / 7.9	41 / 90	295
-C	ACL43-0185	0.13	Bus bar	261 / 10.3	233 / 9.2	170 / 6.7	29 / 64	240
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	3	LKT 22.5-600-DD60	3x 55.2	3x 85 / 3.35	3x 371 / 14.6	3x 2.1 / 4.9	88