


Technical Data - IHF


440-480 Volts, 60Hz



IHF56-0240

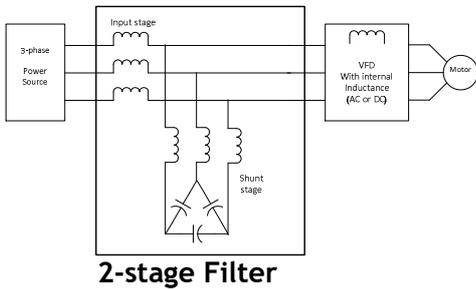

2-stage Filter




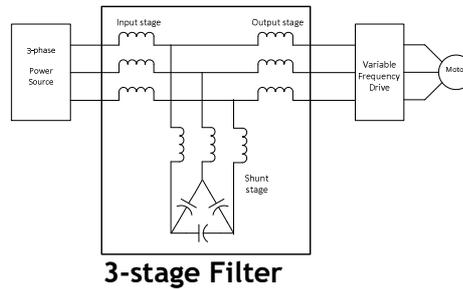


3-stage Filter

Reactors:

Input & Output Stage Reactor

Shunt Stage Reactor

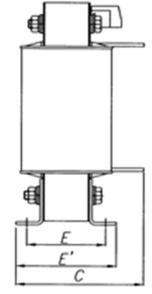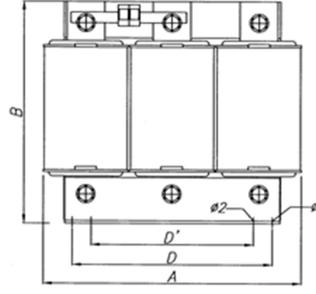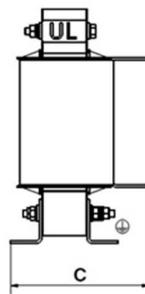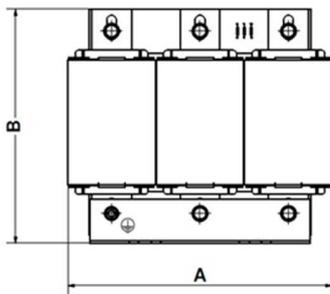

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0244	0.20	Bus bar	300 / 11.8	329 / 13	184 / 7.3	49 / 108	380
Shunt Stage	ACS43-0114	0.42	Bus bar	300 / 11.8	266 / 10.5	198 / 7.8	49 / 108	410

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0240	0.30	Bus bar	420 / 16.6	470 / 18.5	310 / 12.2	121 / 266	630
-B	ACL45-0243	0.159	Bus bar	300 / 11.8	297 / 11.8	182 / 7.2	43 / 97	390
-C	ACL43-0242	0.10	Bus bar	300 / 11.8	236 / 9.3	186 / 7.4	36 / 82	270
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	4	LKT 22.5-600-DD60	4x 55.2	4x 85 / 3.35	4x 371 / 14.6	4x 2.1 / 4.9	117