
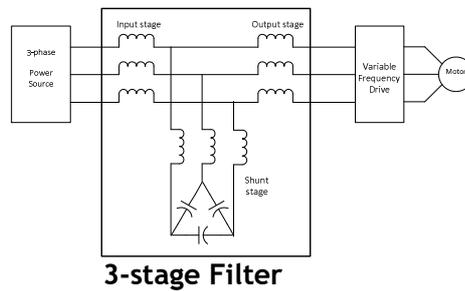


Technical Data - IHF

440-480 Volts, 60Hz




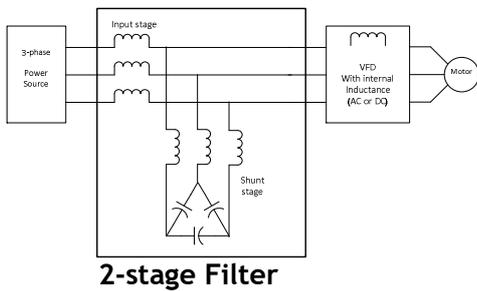


IHF56-0302

Reactors:

Input & Output Stage Reactor

Shunt Stage Reactor

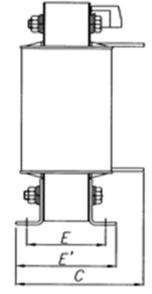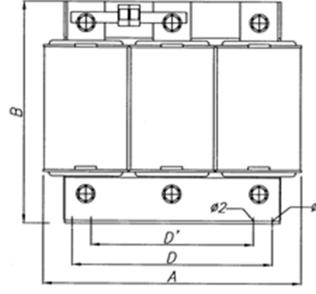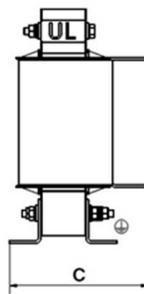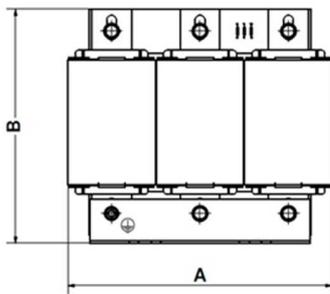

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0339	0.145	Bus bar	300 / 11.8	454 / 17.9	195 / 7.8	74 / 163	480
Shunt Stage	ACS43-0142	0.34	Bus bar	360 / 14.2	314 / 12.4	208 / 8.2	62 / 137	510

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0302	0.24	Bus bar	420 / 16.6	510 / 20	342 / 13.5	143 / 315	690
-B	ACL45-0302	0.13	Bus bar	300 / 11.8	297 / 11.8	201 / 7.9	51 / 115	440
-C	ACL43-0302	0.08	Bus bar	300 / 11.8	368 / 10.6	194 / 7.7	41 / 90	330
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	5	LKT 22.5-600-DD60	5x 55.2	5x 85 / 3.35	5x 371 / 14.6	5x 2.1 / 4.9	146