



Technical Data - IHF

440-480 Volts, 60Hz

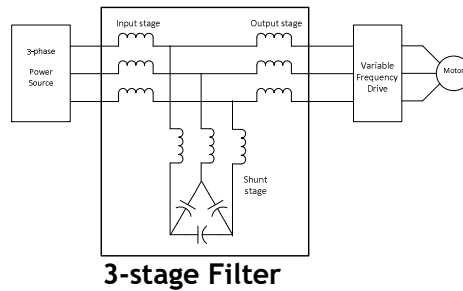


IHF56-0361

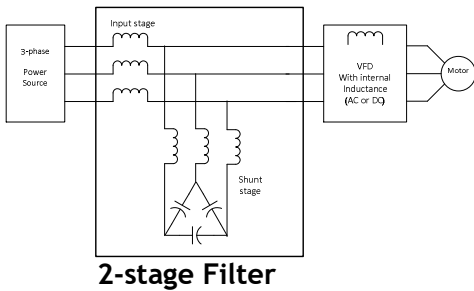


Reactors:

Input & Output Stage Reactor



Shunt Stage Reactor

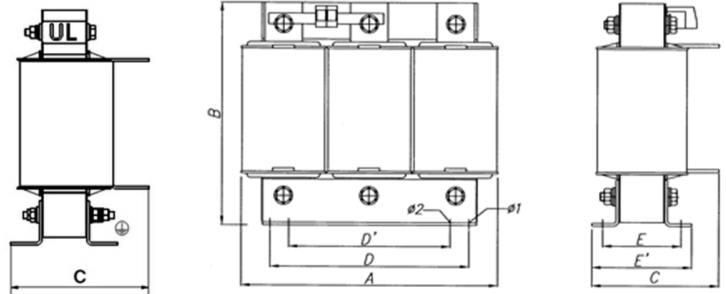

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0382	0.13	Bus bar	300 / 11.8	421 / 16.6	219 / 8.7	78 / 172	510
Shunt Stage	ACS43-0170	0.28	Bus bar	360 / 14.2	346 / 13.6	208 / 8.2	68 / 150	560

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0361	0.20	Bus bar	420 / 16.6	512 / 20.2	374 / 14.8	175 / 385	860
-B	ACL45-0366	0.106	Bus bar	300 / 11.8	330 / 13	211 / 8.3	58 / 128	510
-C	ACL43-0365	0.066	Bus bar	300 / 11.8	297 / 11.8	209 / 8.3	51 / 113	380
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	6	LKT 22.5-600-DD60	6x 55.2	6x 85 / 3.35	6x 371 / 14.6	6x 2.1 / 4.9	175