



Technical Data - IHF

440-480 Volts, 60Hz

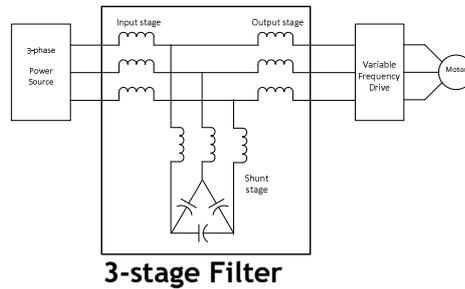





IHF56-0415

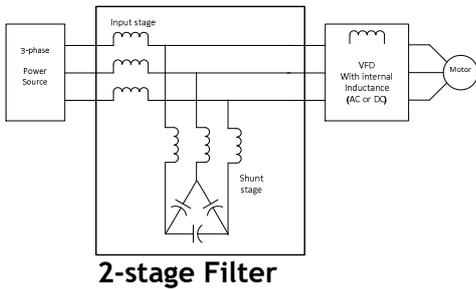

Reactors:

Input & Output Stage Reactor

Shunt Stage Reactor

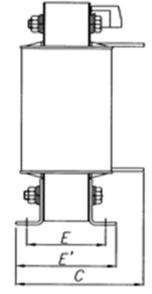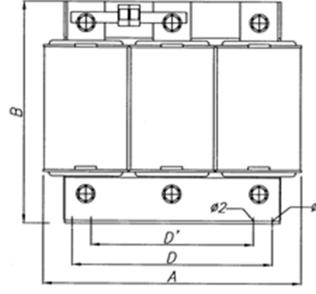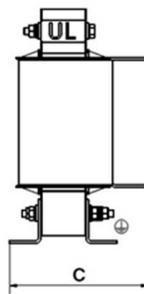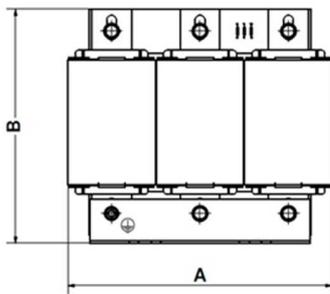

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0424	0.115	Bus bar	300 / 11.8	420 / 16.6	247 / 9.8	93 / 205	550
Shunt Stage	ACS43-0200	0.24	Bus bar	420 / 16.5	371 / 14.6	211 / 8.3	82 / 181	650

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0420	0.17	Bus bar	420 / 16.6	578 / 22.8	419 / 16.5	195 / 429	890
-B	ACL45-0429	0.092	Bus bar	300 / 11.8	329 / 13	243 / 9.6	75 / 165	570
-C	ACL43-0415	0.058	Bus bar	300 / 11.8	298 / 11.8	216 / 8.5	52 / 117	420
No suffix	n/a	n/a	n/a	/ n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	7	LKT 22.5-600-DD60	7x 55.2	7x 85 / 3.35	7x 371 / 14.6	7x 2.1 / 4.9	204