
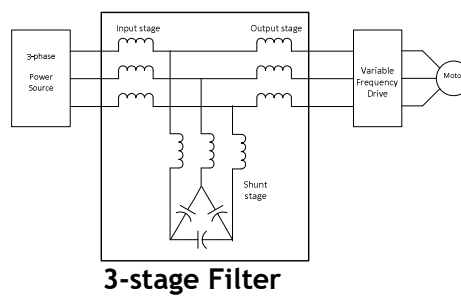


# Technical Data - IHF


## 440-480 Volts, 60Hz

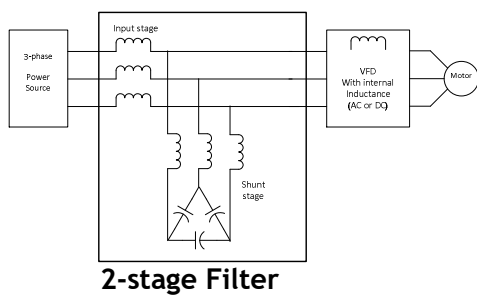


**IHF56-0480**

### Reactors:

#### Input & Output Stage Reactor



#### Shunt Stage Reactor

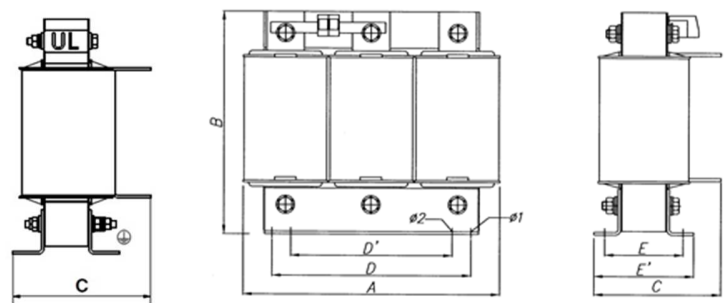

Note: Shunt stage reactor includes temperature switch

### Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0488	0.10	Bus bar	300 / 11.8	451 / 17.8	247 / 9.8	103 / 227	620
Shunt Stage	ACS43-0227	0.21	Bus bar	420 / 16.5	370 / 14.6	226 / 8.9	93 / 205	710

### Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0480	0.15	Bus bar	480 / 18.9	640 / 25.2	401 / 15.8	216 / 476	1000
-B	ACL45-0488	0.08	Bus bar	300 / 11.8	423 / 16.7	217 / 8.6	74 / 165	660
-C	ACL43-0480	0.05	Bus bar	300 / 11.8	330 / 13	215 / 8.5	57 / 128	460
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

### Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	8	LKT 22.5-600-DD60	8x 55.2	8x 85 / 3.35	8x 371 / 14.6	8x 2.1 / 4.9	234