
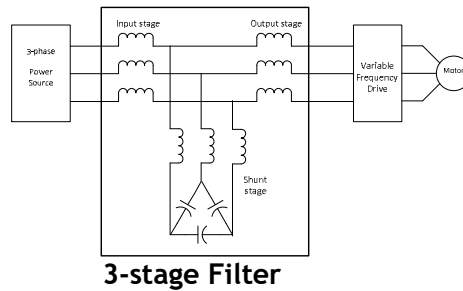


Technical Data - IHF


440-480 Volts, 60Hz

IHF56-0515

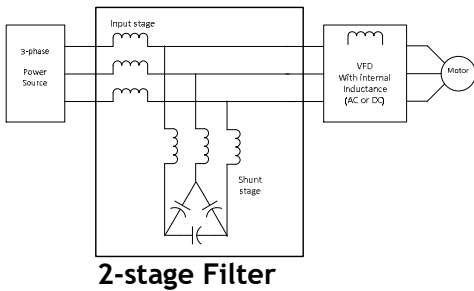


Reactors:

Input & Output Stage Reactor



Shunt Stage Reactor

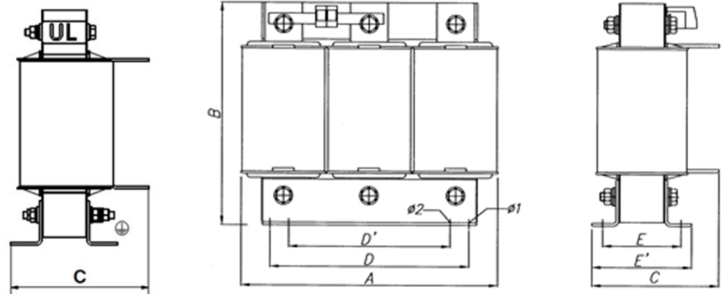

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter):

2-stage	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0577	0.083	Bus bar	360 / 14.2	470 / 18.5	223 / 9.2	102 / 227	580
Shunt Stage	ACS43-0255	0.18	Bus bar	420 / 16.5	370 / 14.6	226 / 8.9	93 / 205	720

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0520	0.138	Bus bar	480 / 18.9	603 / 23.7	423 / 16.6	244 / 537	970
-B	ACL45-0530	0.074	Bus bar	300 / 11.8	421 / 16.6	249 / 9.8	97 / 214	750
-C	ACL43-0515	0.047	Bus bar	300 / 11.8	329 / 13	226 / 8.9	65 / 143	500
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors:

	Qty	p/n	uF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	9	LKT 22.5-600-DD60	9x 55.2	9x 85 / 3.35	9x 371 / 14.6	9x 2.1 / 4.9	263