
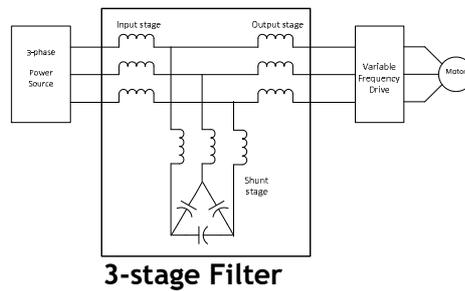


Technical Data - IHF


440-480 Volts, 60Hz

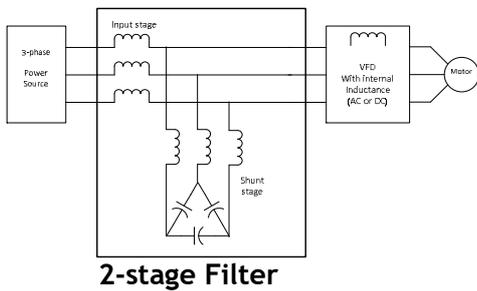


IHF56-0720

Reactors:

Input & Output Stage Reactor

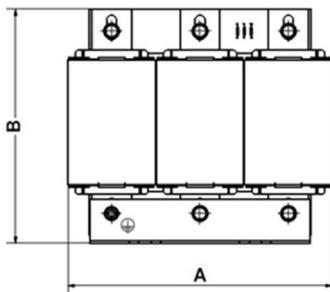

Shunt Stage Reactor

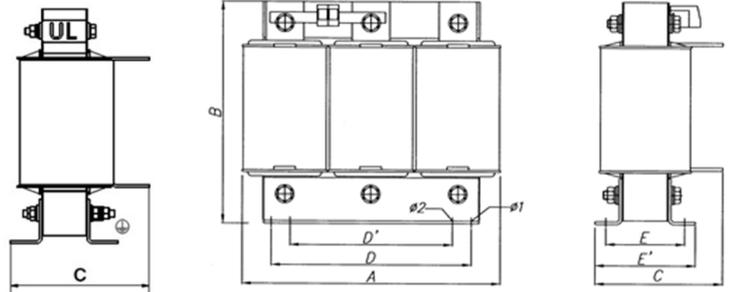

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter): 2pcs of ACS43-0170 IN PARALLEL

2-stage	Reactor p/n	μH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0774	63	Bus bar	452 / 17.8	588 / 23.2	237 / 9.5	150 / 330	780
Shunt Stage	2x ACS43-0170	2x 280	Bus bar	360 / 14.2	346 / 13.6	208 / 8.2	2x 68 / 150	2x 560

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	μH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0720	100	Bus bar	18.9	29.3	17.2	665	1300
-B	ACL45-0731	53	Bus bar	394 / 15.5	533 / 21	238 / 9.4	123 / 271	870
-C	ACL43-0731	33	Bus bar	300 / 11.8	455 / 17.9	219 / 8.7	80 / 176	730
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors: 2 sets of 6 capacitors (6 each with each ACS43-0170)

	Qty	p/n	μF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	6	LKT 22.5-600-DD60	6x 55.2	6x 85 / 3.35	6x 371 / 14.6	6x 2.1 / 4.9	350
	6	LKT 22.5-600-DD60	6x 55.2	6x 85 / 3.35	6x 371 / 14.6	6x 2.1 / 4.9	