
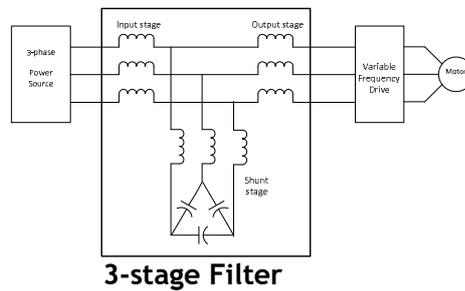


Technical Data - IHF


440-480 Volts, 60Hz

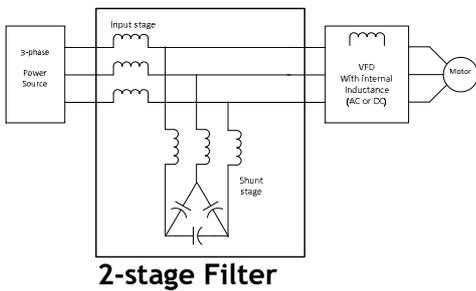


IHF56-0840

Reactors:

Input & Output Stage Reactor

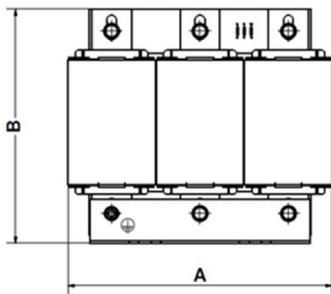

Shunt Stage Reactor

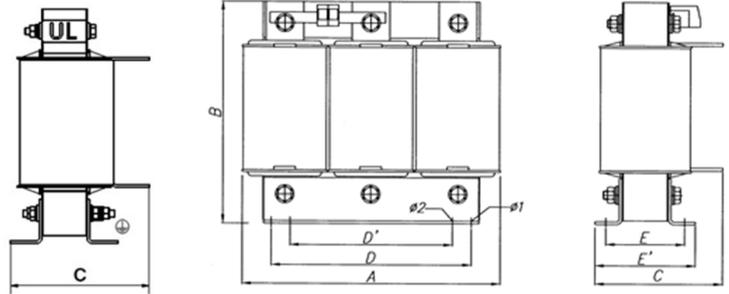

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter): 2pcs of ACS43-0200 IN PARALLEL

2-stage	Reactor p/n	μH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0869	56	Bus bar	452 / 17.8	589 / 23.2	263 / 10.5	172 / 379	860
Shunt Stage	2x ACS43-0200	2x 240	Bus bar	420 / 16.5	371 / 14.6	211 / 8.3	2x 82 / 181	2x 650

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	μH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-0840	85	Bus bar	480 / 18.9	748 / 29.5	468 / 18.5	338 / 745	1370
-B	ACL45-0848	46	Bus bar	394 / 15.5	566 / 22.3	247 / 9.8	125 / 275	990
-C	ACL43-0841	29	Bus bar	330 / 13	517 / 20.4	234 / 9.3	100 / 220	830
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors: 2 sets of 7 capacitors (7 each with each ACS43-0200)

	Qty	p/n	μF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	7	LKT 22.5-600-DD60	7x 55.2	7x 85 / 3.35	7x 371 / 14.6	7x 2.1 / 4.9	409
	7	LKT 22.5-600-DD60	7x 55.2	7x 85 / 3.35	7x 371 / 14.6	7x 2.1 / 4.9	