
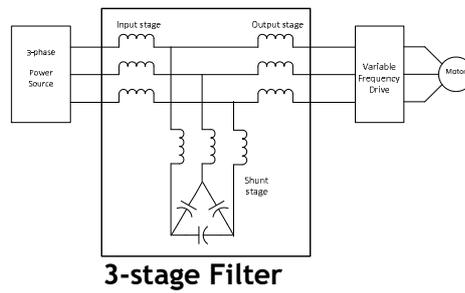


Technical Data - IHF

440-480 Volts, 60Hz

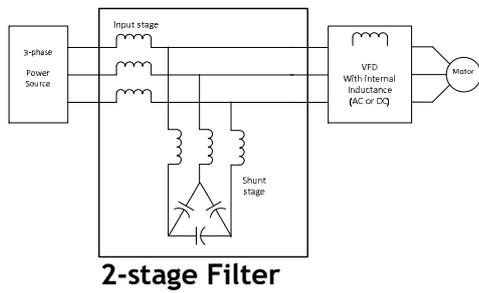


IHF56-0960

Reactors:

Input & Output Stage Reactor

Shunt Stage Reactor

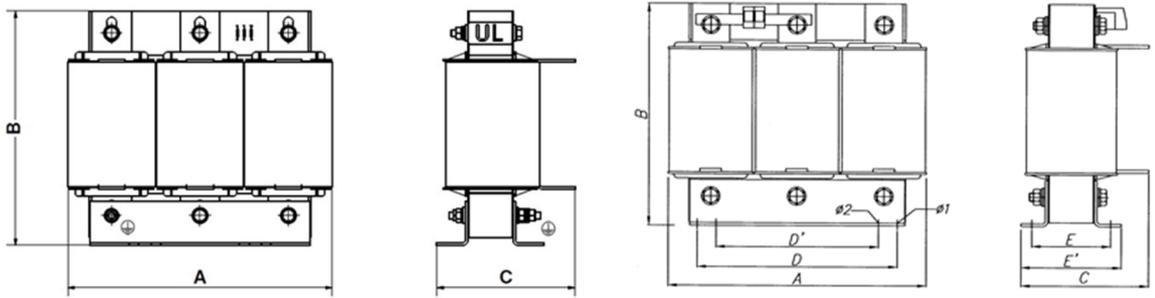

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter): 2pcs of ACS43-0227 IN PARALLEL

2-stage	Reactor p/n	μH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-0975	50	Bus bar	452 / 17.8	683 / 26.9	247 / 9.9	175 / 385	1050
Shunt Stage	2x ACS43-0227	2x 210	Bus bar	420 / 16.5	370 / 14.6	226 / 8.9	2x 93 / 205	2x 710

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	μH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A	PSD53-1000	70	Bus bar	550 / 21.6	908 / 35.7	485 / 19.1	415 / 913	2260
-B	ACL45-0975	40	Bus bar	452 / 17.8	591 / 23.3	258 / 10.2	152 / 335	1050
-C	ACL43-0961	25	Bus bar	330 / 13	550 / 21.7	234 / 9.2	100 / 220	920
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors: 2 sets of 8 capacitors (8 each with each ACS43-0227)

	Qty	p/n	μF (3x Δ)	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	8	LKT 22.5-600-DD60	8x 55.2	8x 85 / 3.35	8x 371 / 14.6	8x 2.1 / 4.9	467
	8	LKT 22.5-600-DD60	8x 55.2	8x 85 / 3.35	8x 371 / 14.6	8x 2.1 / 4.9	