
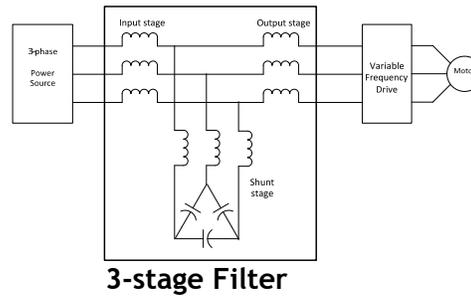


Technical Data - IHF

440-480V, 60hz


Document:	IHF Data - 480V
Date:	05/11/2021
Page:	30 of 30

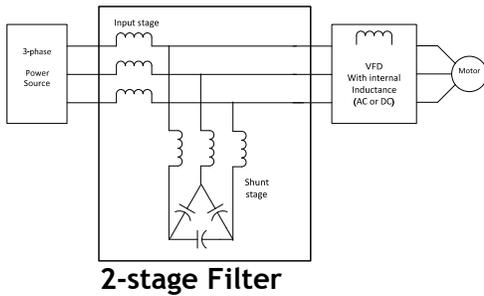


IHF56-1440

Reactors:

Input & Output Stage Reactor

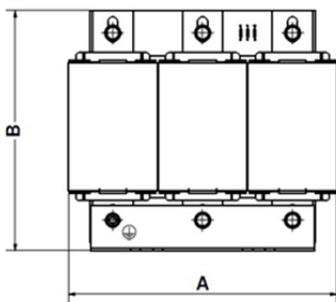

Shunt Stage Reactor

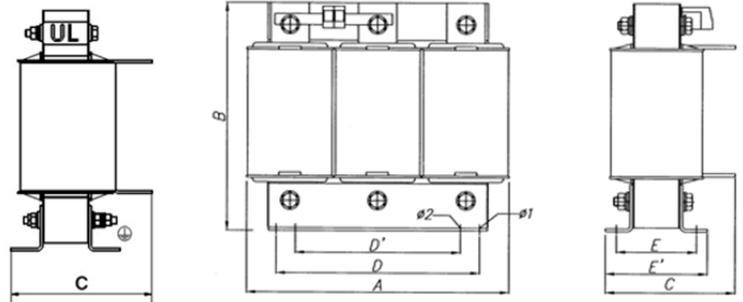

Note: Shunt stage reactor includes temperature switch

Reactors for input stage and shunt stage (2-stage Filter): 3pcs of ACS43-0227 IN PARALLEL

2-stage	Reactor p/n	mH	Terminals	A (inches)	B (inches)	C (inches)	Weight (lbs)	Watts
Input Stage	ACL65-1440	0.034	Bus bar	17	32	15	634	1500
Shunt Stage	2x ACS43-0255	2x 0.189	Bus bar	2x 16.54	2x 14.61	2x 9.09	2x 212	2x 720

Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A (inches)	B (inches)	C (inches)	Weight (lbs)	Watts
-A	PSD53-1460	0.050	Bus bar	21.66	36.66	17.88	1241	3000
-B	ACL45-1500	0.026	Bus bar	20.71	32.56	13.59	711	1700
-C	ACL43-1500	0.016	Bus bar	20.71	32.48	12.56	577	1400
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Capacitors: 2 sets of 9 capacitors (9 each with each ACS43-0227)

	Qty	p/n	uF (3x Δ)	Diameter (inches)	Height (inches)	Weight (pounds)	Watts
Shunt Stage	8	LKT 22.5-600-DD60	8x 55.2	8x 3.35	8x 13.9	8x 4.9	700
	8	LKT 22.5-600-DD60	8x 55.2	8x 3.35	8x 13.9	8x 4.9	
	8	LKT 22.5-600-DD60	8x 55.2	8x 3.35	8x 13.9	8x 4.9	