
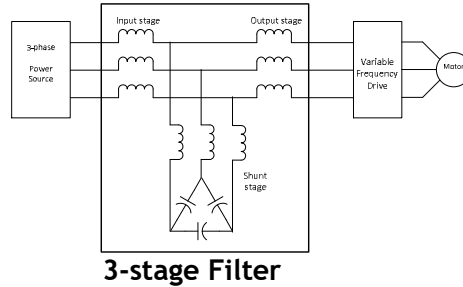


# Technical Data - IHF


## 440-480 Volts, 60Hz

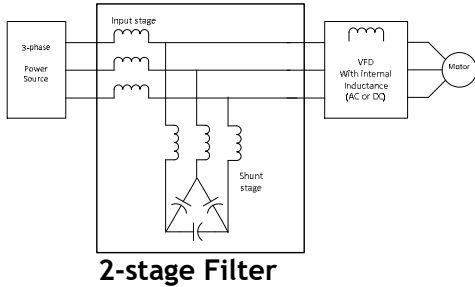


**IHF56-1770**

### Reactors:

#### Input & Output Stage Reactor



#### Shunt Stage Reactor

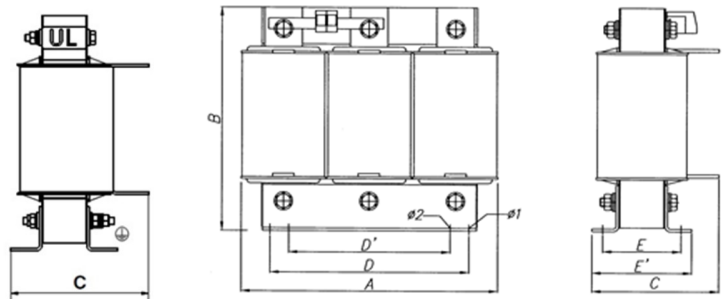

Note: Shunt stage reactor includes temperature switch

### Reactors for input stage and shunt stage (2-stage Filter): 3pcs of ACS43-0255 IN PARALLEL

2-stage	Reactor p/n	$\mu$ H	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
Input Stage	ACL65-1770	42	Bus bar	550 / 21.6	871 / 34.3	431 / 17	421 / 928	1950
Shunt Stage	3x ACS43-0255	3x 180	Bus bar	420 / 16.5	371 / 14.6	231 / 9.1	3x 96 / 212	3x 720

### Optional Reactors for output stage (3-stage filter):

Suffix (Cat. No.)	Reactor p/n	mH	Terminals	A [mm/inch]	B [mm/inch]	C [mm/inch]	Weight [kg/lbs]	Watts
-A								
-B								
-C								
No suffix	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

### Capacitors: 3 sets of 9 capacitors (9 each with each ACS43-0255)

	Qty	p/n	$\mu$ F (3x $\Delta$ )	Diameter [mm/inch]	Height [mm/inch]	Weight [kg/lbs]	Watts
Shunt Stage	9	LKT 22.5-600-DD60	9x 55.2	9x 85 / 3.35	9x 371 / 14.6	9x 2.1 / 4.9	
	9	LKT 22.5-600-DD60	9x 55.2	9x 85 / 3.35	9x 371 / 14.6	9x 2.1 / 4.9	
	9	LKT 22.5-600-DD60	9x 55.2	9x 85 / 3.35	9x 371 / 14.6	9x 2.1 / 4.9	